

Horizon™

Interior Wall-Mount Vehicle Dryer



Shown with optional oscillating center nozzle.

Standard Features

- Ideal for in-bay automatics
- Frame curved for distinctive look and improved strength
- Wall mounting eliminates need to drill into heated floors
- Impulse welded aluminum construction
- One-piece rotomolded fan housings
- Inlet and outlet safety screens
- 10 H.P. TEFC motors with special SUPERfans™

Optional Features


- 15 H.P. motors and fans
- Oscillating center nozzle
- Side nozzle extensions
- Motor control panels with step-start feature

The
Dryer Pros




**Model 36-108-TM
Top Mount Side Nozzles**

Overall Height: 127
 Overall Width: Adjustable 14'-16'
 Overall Length: 45"
 Maximum Vehicle Clearance: 90" h

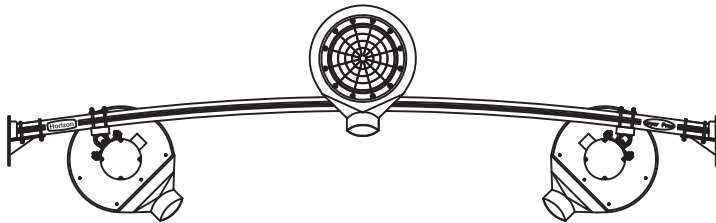

**Model 36-108-UM
Under Mount Side Nozzles**


Overall Height: 127
 Overall Width: Adjustable 14'-16'
 Overall Length: 45"
 Maximum Vehicle Clearance: 90" h x 102" w

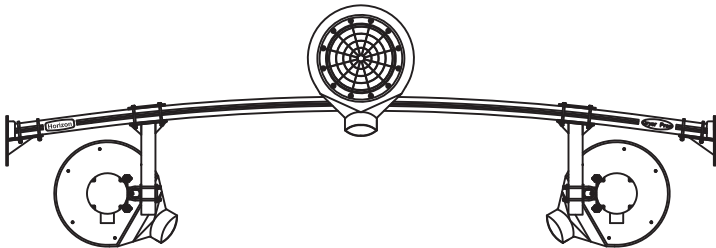

**Model 36-108-DT
Drop-Tube Mount Side Nozzles**

Overall Height: 127
 Overall Width: Adjustable 14'-16'
 Overall Length: 45"
 Maximum Vehicle Clearance: 90" h x 102" w

Authorized Distributor



© 2010 The Dryer Pros LLC All rights reserved.
 The Dryer Pros reserves the right to make improvements on products, and change specifications and prices accordingly without notice.

Air Flow:
 10 H.P. Blower Assy. 3,600 CFM
 15 H.P. Blower Assy. 4,000 CFM

Air Velocity:
 10 H.P. Blower Assy. 162 MPH
 15 H.P. Blower Assy. 182 MPH

Amp Load:
 10 H.P. Blower Assy. 23 amps @ 230/3/60 volts
 15 H.P. Blower Assy. 34 amps @ 230/3/60 volts
 1/3 H.P. Osc. Motor 5.5 amps @ 115 VAC

Oscillator Bearings:
 Osc. Nozzle Arm 1", 2-bolt, pillow block
 Jack Shafts 1", 2-bolt, flanged
 Drive Rods 1/2", 2-bolt, flanged

NOTE: Motor starters and activation system required.

