

Progressive™ Horizon Series

Vehicle Drying System



Shown with 4 arch frames and 8 nozzles.


Standard Features

- Unique design features curved bridge with massive support legs
- Custom tailored to individual needs
- Unlimited nozzle configurations
- 10 H. P. or 15 H. P. motors with SUPERfans™
- One-piece rotomolded fan housings with oval nozzles
- Heavy aluminum construction
- Ideal for fast conveyors

Optional Features

- Patented oscillating top nozzles
- Patented Dual Port™ top nozzles for drying rear windows and trunks
- Energy saving Air On-Demand™ system
- Sound absorbing inlet covers
- Motor control panels with step-start feature or Variable Frequency Drive (VFD)

The
Dryer Pros®

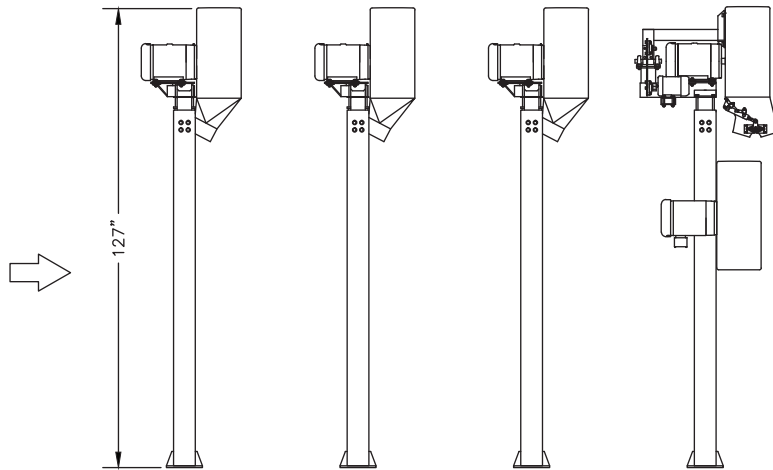


SIDE VIEW

NOTE: This is one of many possible layouts. Optional Oscillating Nozzle with Dual Port™ option shown on last drying arch.

Overall Height from Floor:	127"
Overall Width:	173-1/2"
Overall Depth:	Varies
Maximum Vehicle Clearance:	90" h x 102" w
Air Flow:	
10 H.P. Blower Assy.	3,600 CFM
15 H.P. Blower Assy.	4,000 CFM
Air Velocity:	
10 H.P. Blower Assy.	162 MPH
15 H.P. Blower Assy.	182 MPH
Amp Load:	
10 H.P. Blower Assy.	23 amps @ 230/3/60 volts
15 H.P. Blower Assy.	34 amps @ 230/3/60 volts

NOTE: Motor starters and activation system required.

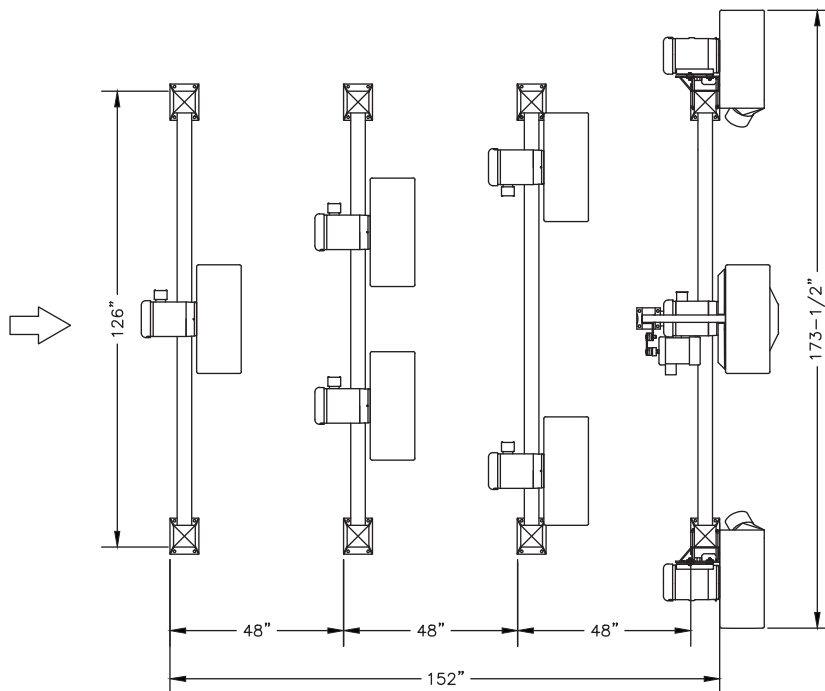

TOP VIEW

© 2009 The Dryer Pros LLC All rights reserved. The Dryer Pros reserves the right to make improvements on products, and change specifications and prices accordingly without notice.

