

# Progressive Tempest Series

## Vehicle Drying System



Shown with 4 arch frames and 8 nozzles.

### Standard Features

- Custom tailored to individual needs
- Unlimited nozzle configurations
- Ideal for fast conveyors
- 10 H.P. or 15 H.P. motors with SUPERfans™
- One-piece rotomolded fan housings with oval nozzles
- Heavy aluminum construction


### Optional Features

- Patented oscillating nozzles
- Patented Dual Port™ Top nozzles for drying rear windows and trunks
- Air On-Demand System
- Motor control panels with step-start feature or Variable Frequency Drive (VFD)

The  
**Dryer Pros**

# Progressive Drying Systems-Tempest Series


## Specifications

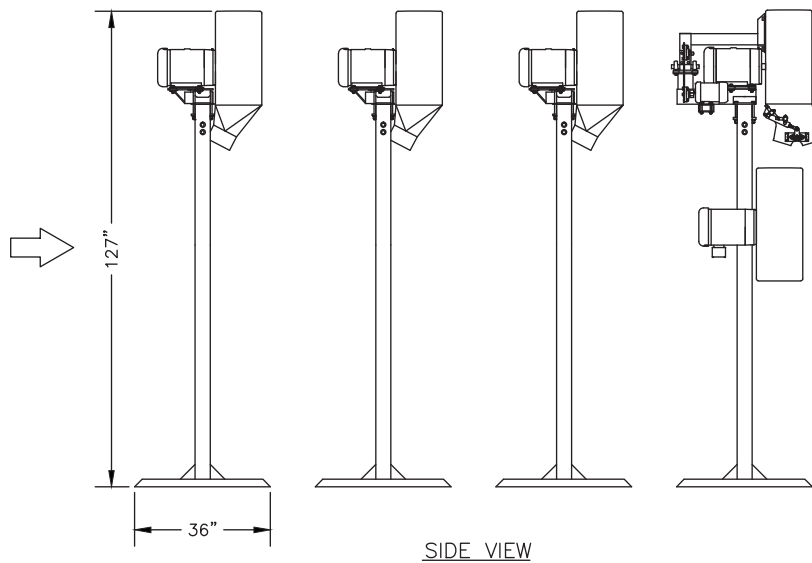

SIDE VIEW

NOTE: This is one of many possible layouts. Optional Oscillating Nozzle with Dual Port™ option shown on last drying arch.

|                            |                          |
|----------------------------|--------------------------|
| Overall Height from Floor: | 127"                     |
| Overall Width:             | 173-1/2"                 |
| Overall Depth:             | Varies                   |
| Maximum Vehicle Clearance: | 90" h x 102" w           |
| Air Flow:                  |                          |
| 10 H.P. Blower Assy.       | 3,600 CFM                |
| 15 H.P. Blower Assy.       | 4,000 CFM                |
| Air Velocity:              |                          |
| 10 H.P. Blower Assy.       | 162 MPH                  |
| 15 H.P. Blower Assy.       | 182 MPH                  |
| Amp Load:                  |                          |
| 10 H.P. Blower Assy.       | 23 amps @ 230/3/60 volts |
| 15 H.P. Blower Assy.       | 34 amps @ 230/3/60 volts |

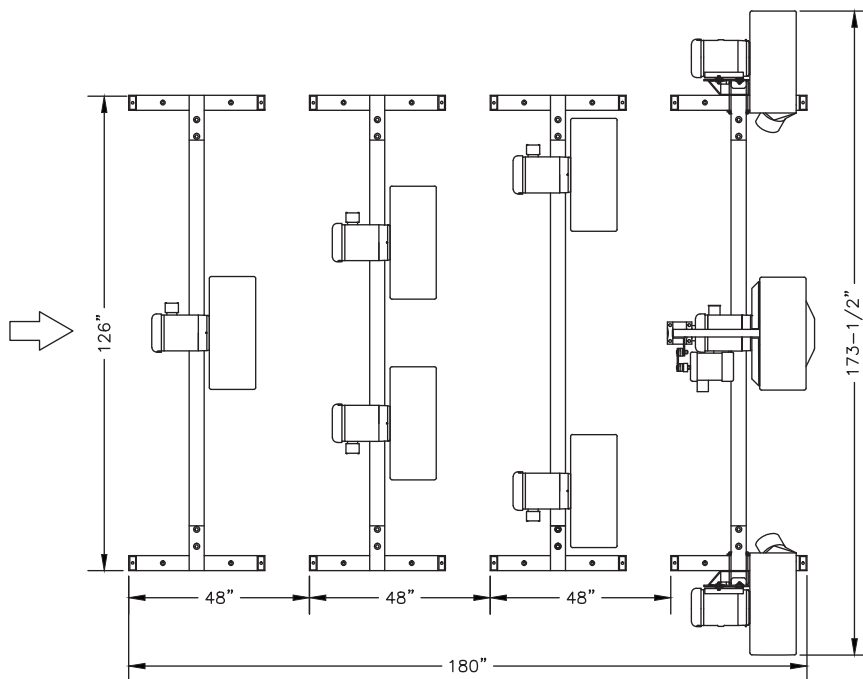

TOP VIEW

NOTE: Motor starters and activation system required.

© 2009 The Dryer Pros LLC All rights reserved. The Dryer Pros reserves the right to make improvements on products, and change specifications and prices accordingly without notice.

