

Horizon™

Interior Wall-Mount Vehicle Dryer



Shown with optional oscillating center nozzle.


Standard Features

- Ideal for use with in-bay automatics
- Frame curved for maximum strength
- Wall mounting eliminates need to drill into heated floors
- Heavy aluminum construction
- One-piece rotomolded fan housings with oval discharge nozzles
- Available with 10HP or 15HP motors with SUPERfans

Optional Features


- Oscillating center nozzle
- Sound absorbing inlet covers
- Motor control panels with step-start feature

The
Dryer Pros

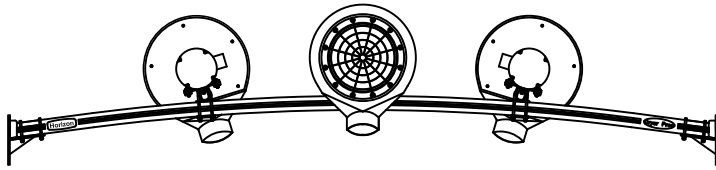


Model 36-108-TM
Top Mount Side Nozzles

Overall Height:	127"
Overall Width:	Adjustable 14'-16'
Overall Length:	45"
Maximum Vehicle Clearance:	90" h x 102" w

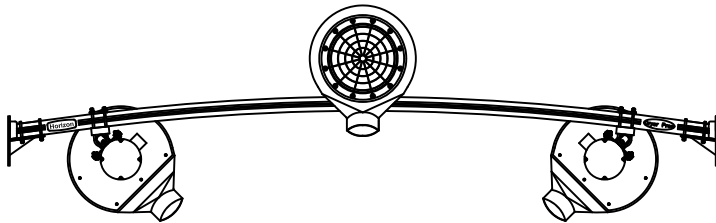

Model 36-108-UM
Under Mount Side Nozzles

Overall Height:	127"
Overall Width:	Adjustable 14'-16'
Overall Length:	45"
Maximum Vehicle Clearance:	90" h x 102" w

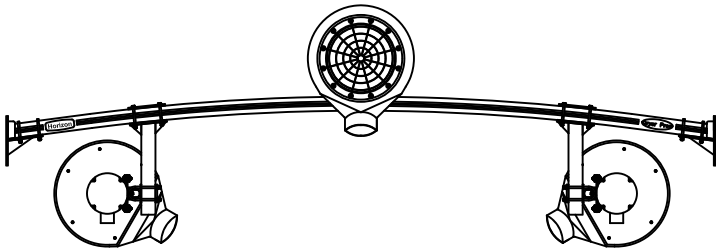

Model 36-108-DT
Drop-Tube Mounted Side Nozzles

Overall Height:	127"
Overall Width:	Adjustable 14'-16'
Overall Length:	45"
Maximum Vehicle Clearance:	90" h x 102" w

Air Flow:

10 H.P. Blower Assy.	3,600 CFM
15 H.P. Blower Assy.	4,000 CFM

Air Velocity:

10 H.P. Blower Assy.	162 MPH
15 H.P. Blower Assy.	182 MPH

Amp Load:

10 H.P. Blower Assy.	23 amps @ 230/3/60 volts
15 H.P. Blower Assy.	34 amps @ 230/3/60 volts
1/3 H.P. Osc. Motor	5.5 amps @ 115 VAC

Oscillator Bearings:

Osc. Nozzle Arm	1", 2-bolt, pillow block
Jack Shafts	1", 2-bolt, flanged
Drive Rods	1/2", 2-bolt, flanged

NOTE: Motor starters and activation system required.

© 2010 The Dryer Pros LLC All rights reserved.
The Dryer Pros reserves the right to make improvements on products, and change specifications and prices accordingly without notice.

